


□
□
□


□
□

□
■

□
■

/

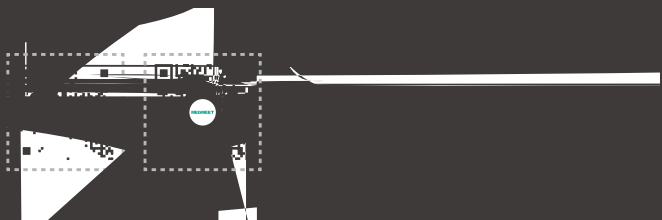

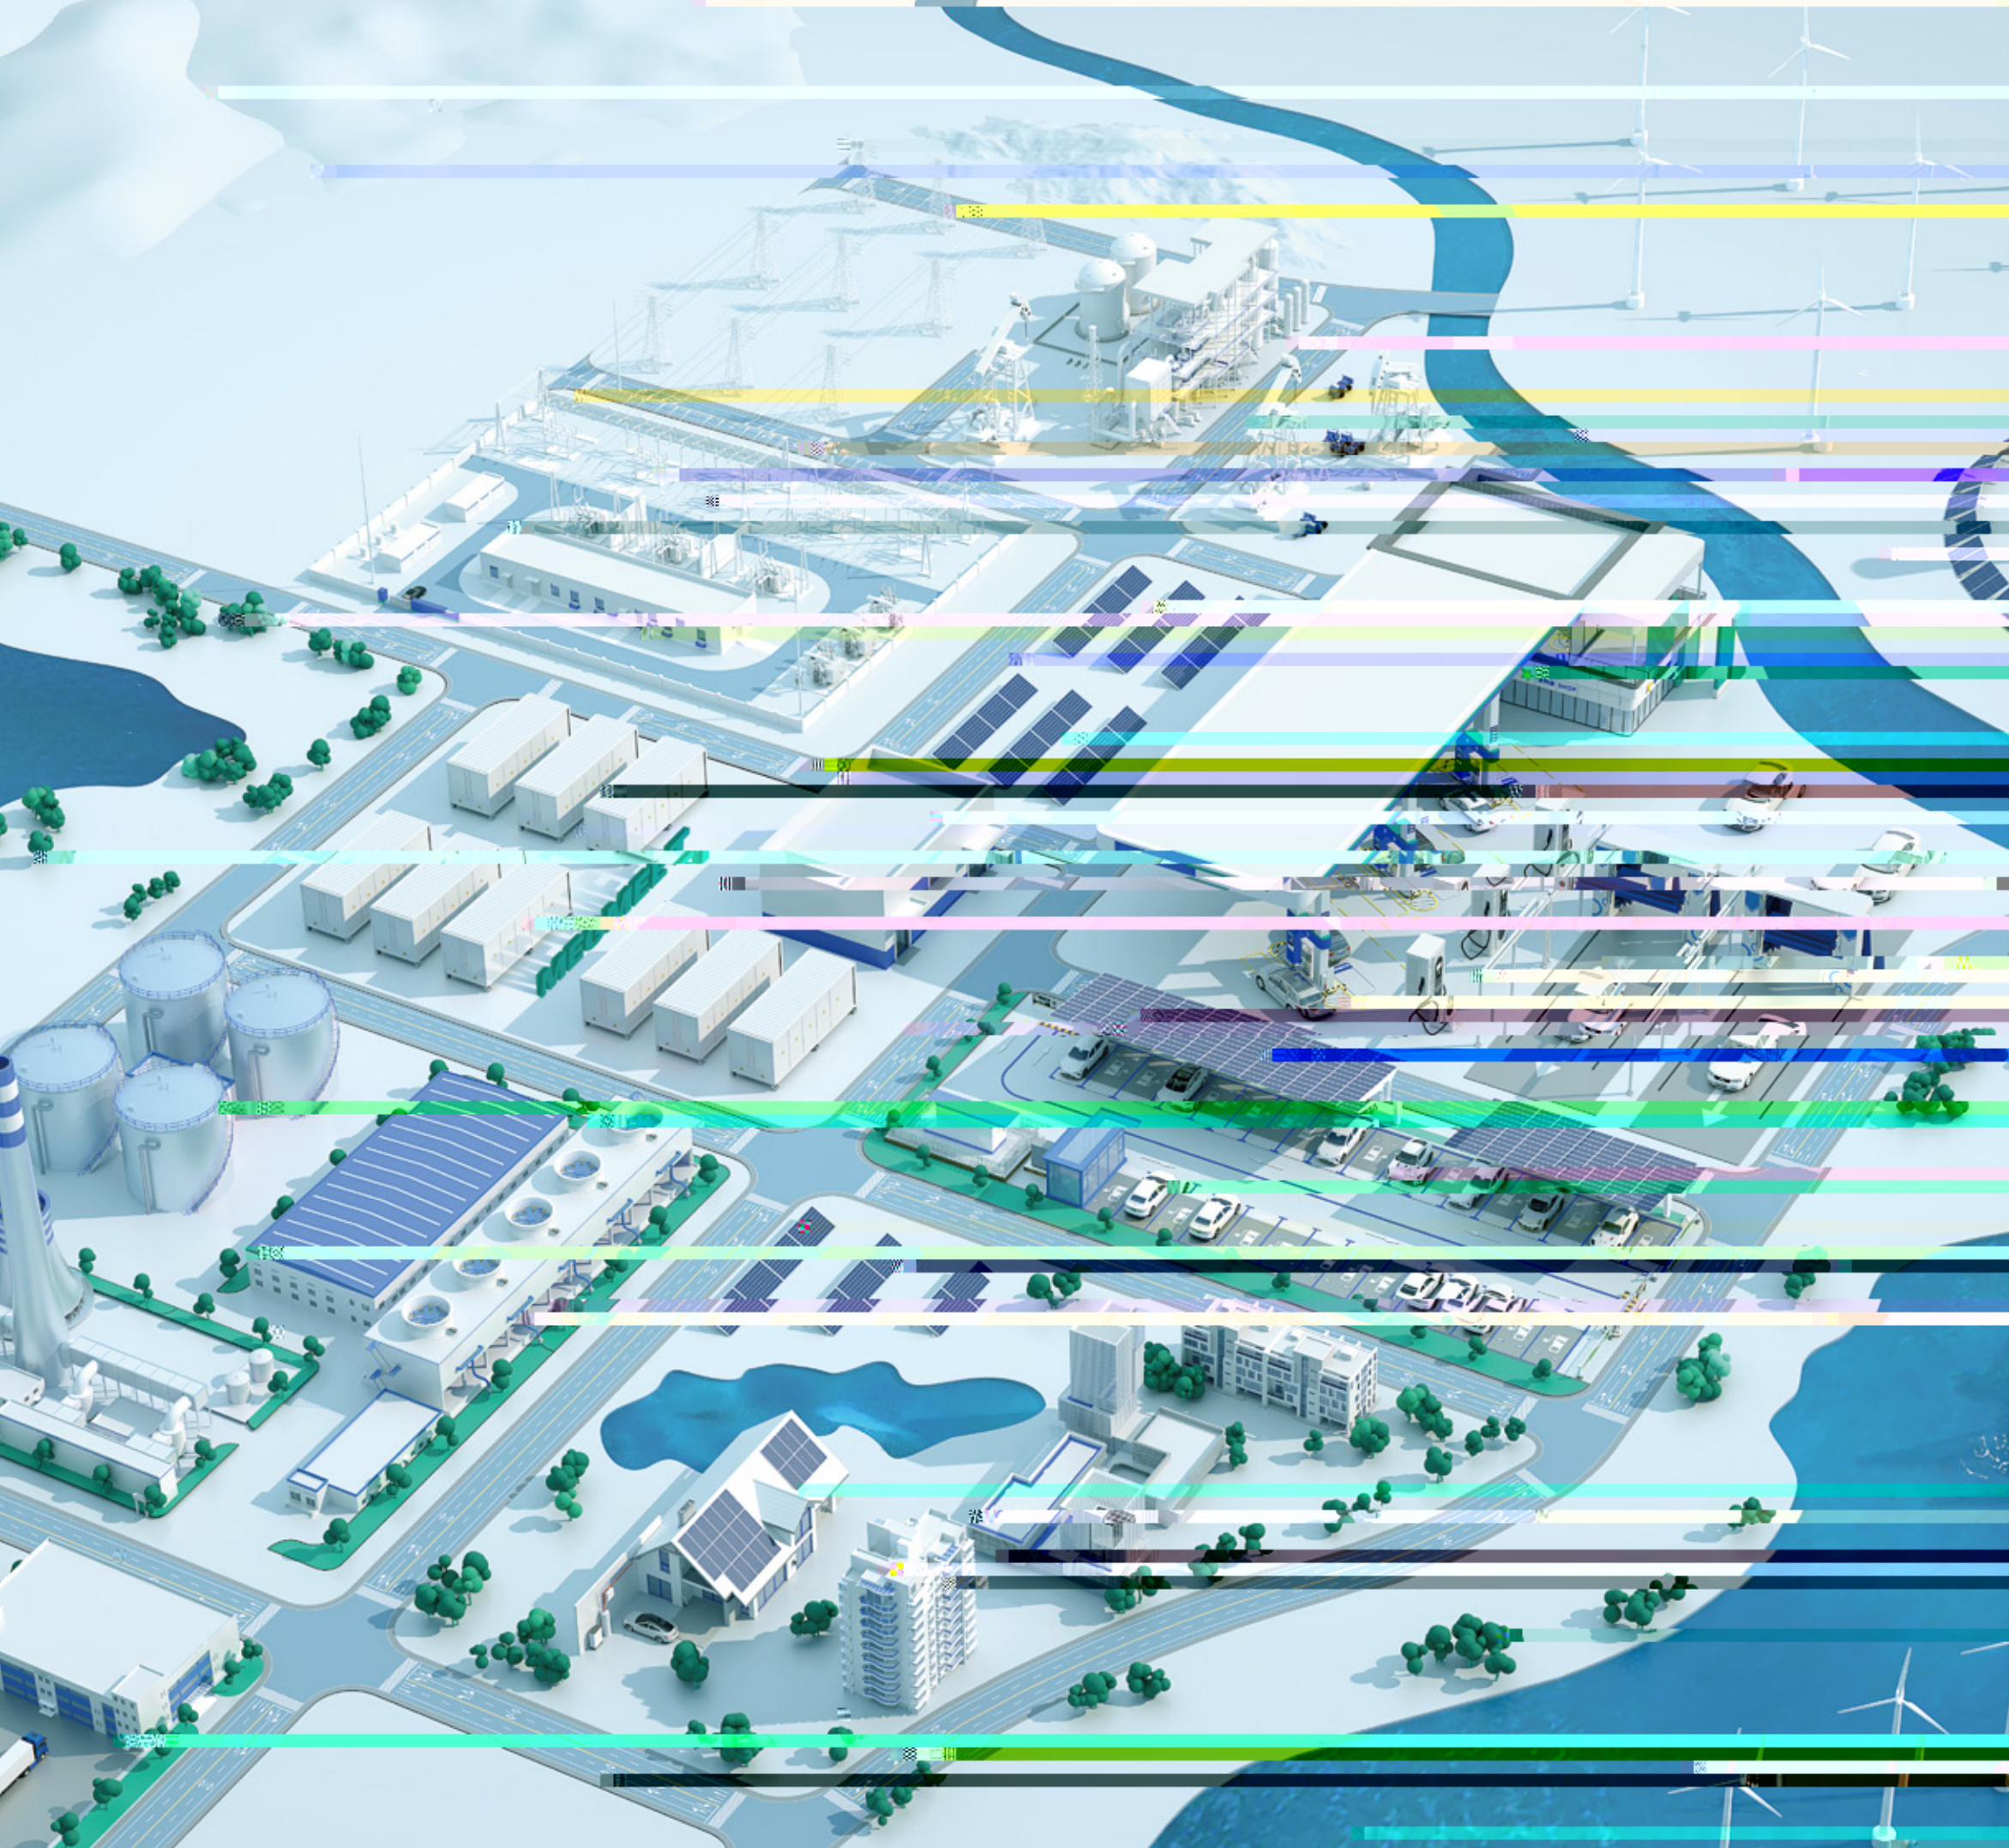


01
03
05
07
09
11

- 13 MIPC1000-80T
- 15 MPS10020KT-C
- 17 MPS20020KT-C
- 19 MIPC1000-100
- 21 MIPC1000-100C2
- 23 MIPC1000-160L
- 25 MIPC1000-135C1

27 CU
28 CU
29 P C

30 kW





120 kW



	~
	~
	~
	~
	~
	≤ 2000 m 2000 m
(W x H x D)	
IP	
	7

240 kW





Blank lines for text input.





()

≤

≤

≤

≤ ()

≤



--

--

--

-40 ~ +65

-40 ~ +65

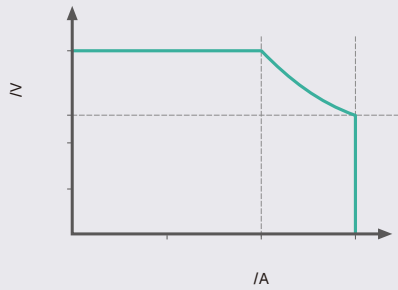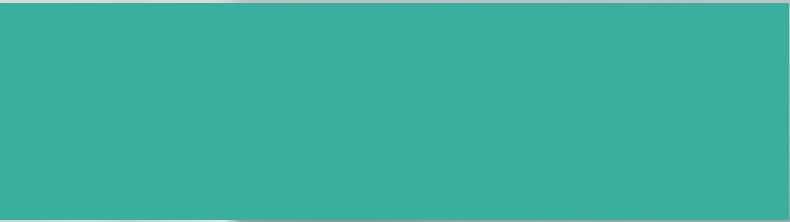


	()
	≤
	≤
	≤
	≤ ()
	≤
	--
	--
	--
	-40 ~ +65
	-40 ~ +65
	≤ ≥ 1 ,
/	
	()



MIPC1000-100


The graph illustrates the power regulation characteristics of the MIPC1000-100. The vertical axis represents power (P) and the horizontal axis represents current (I/A). The curve shows that the power supply maintains a constant output power in the constant current region (at low currents) and then enters a power reduction region (as current increases) before reaching a constant power region (at high currents).

30 kW

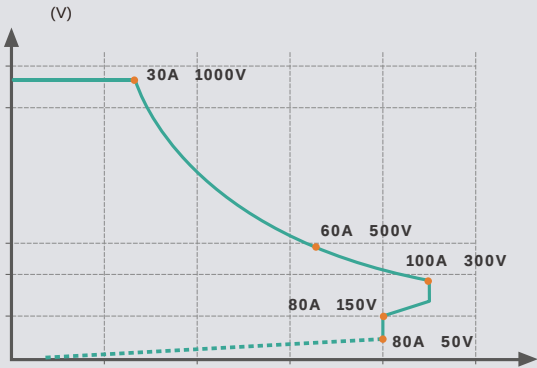


	/ 323~456 VAC (280~480 VAC ()
	> 0.99 @ 50%~100%
	5% @ 50%~100% @ 380
	≥
	≤
	≤
	≤
	≤ ± 1% (20%~100%)
	≤
	- - -
	-40 ~ +75
	-40 ~ +75
	5~95%
	2000 m, ≤ 4000 m 100 m 1
	300,000
	4.2 kVDC - 3.5 kVDC - 3.5 kVDC - 4.2 kVDC -CAN 4.2 kVDC -CAN
/	,
/	,
	,
(W×H×D)	459 mm ()

40 kW

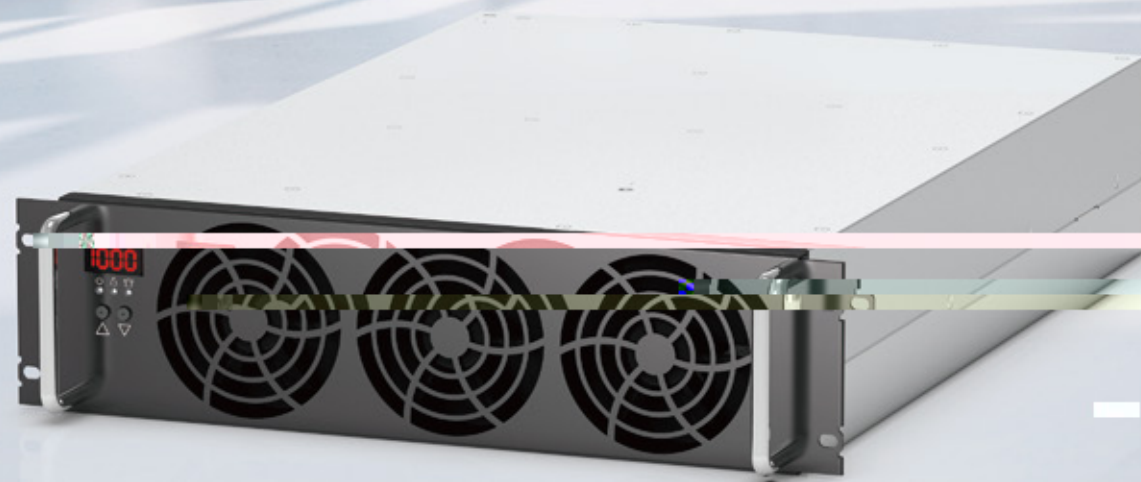


(CCU)

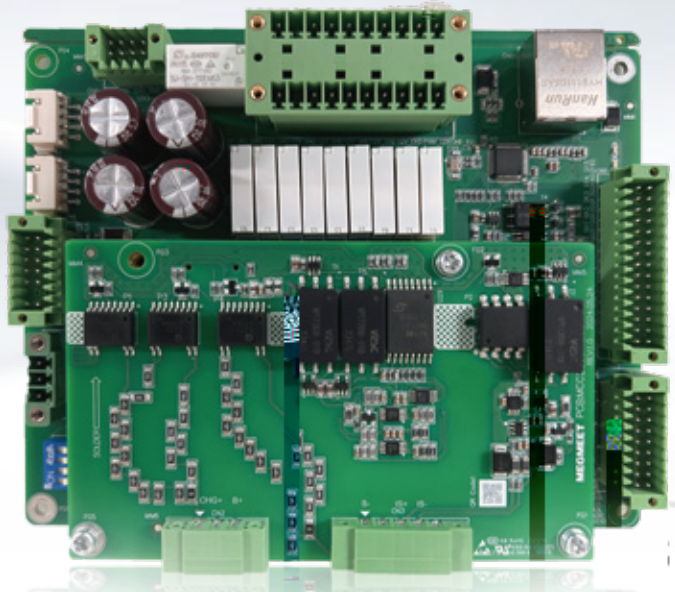

—	—	—	—
—	—	—	—
—	—	—	—

(CU)

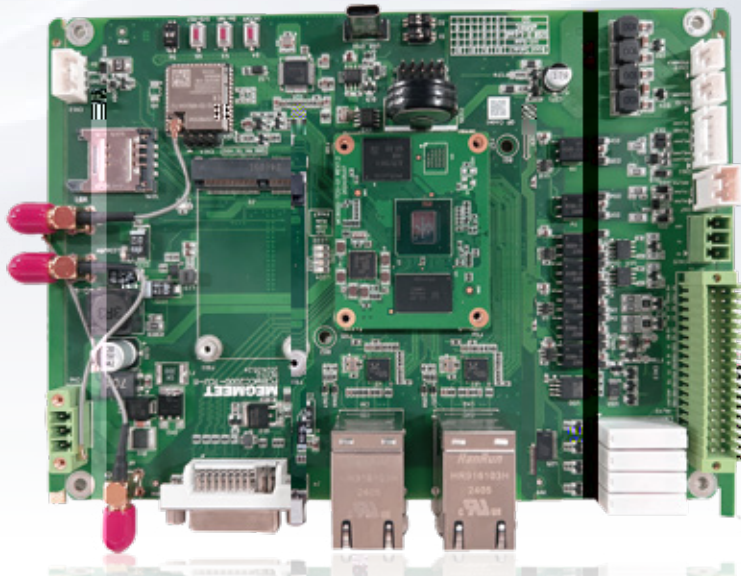

POS M1 QR




4G WIFI



—	—	—
—	—	—
—	—	—
—	—	—

(PLC

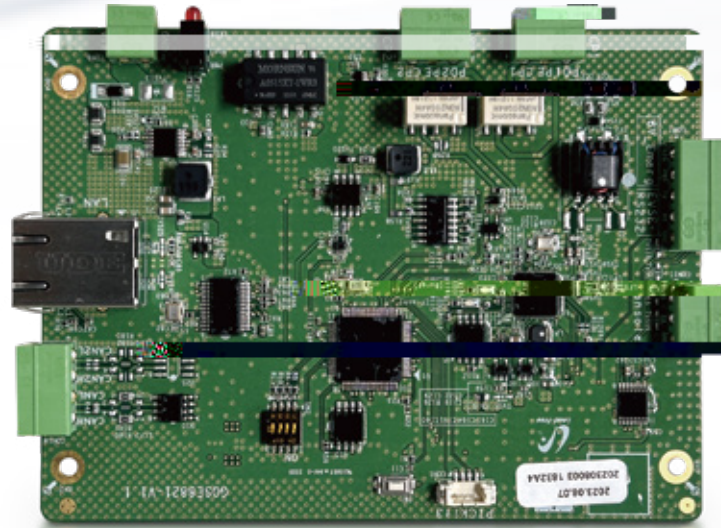

R&D

>3000

35% 

1990

↑ 2024 400+

&

32

● 9

38

28



CNAS TUV UL-WTDP UL-CTF



ODM OEM

