





/

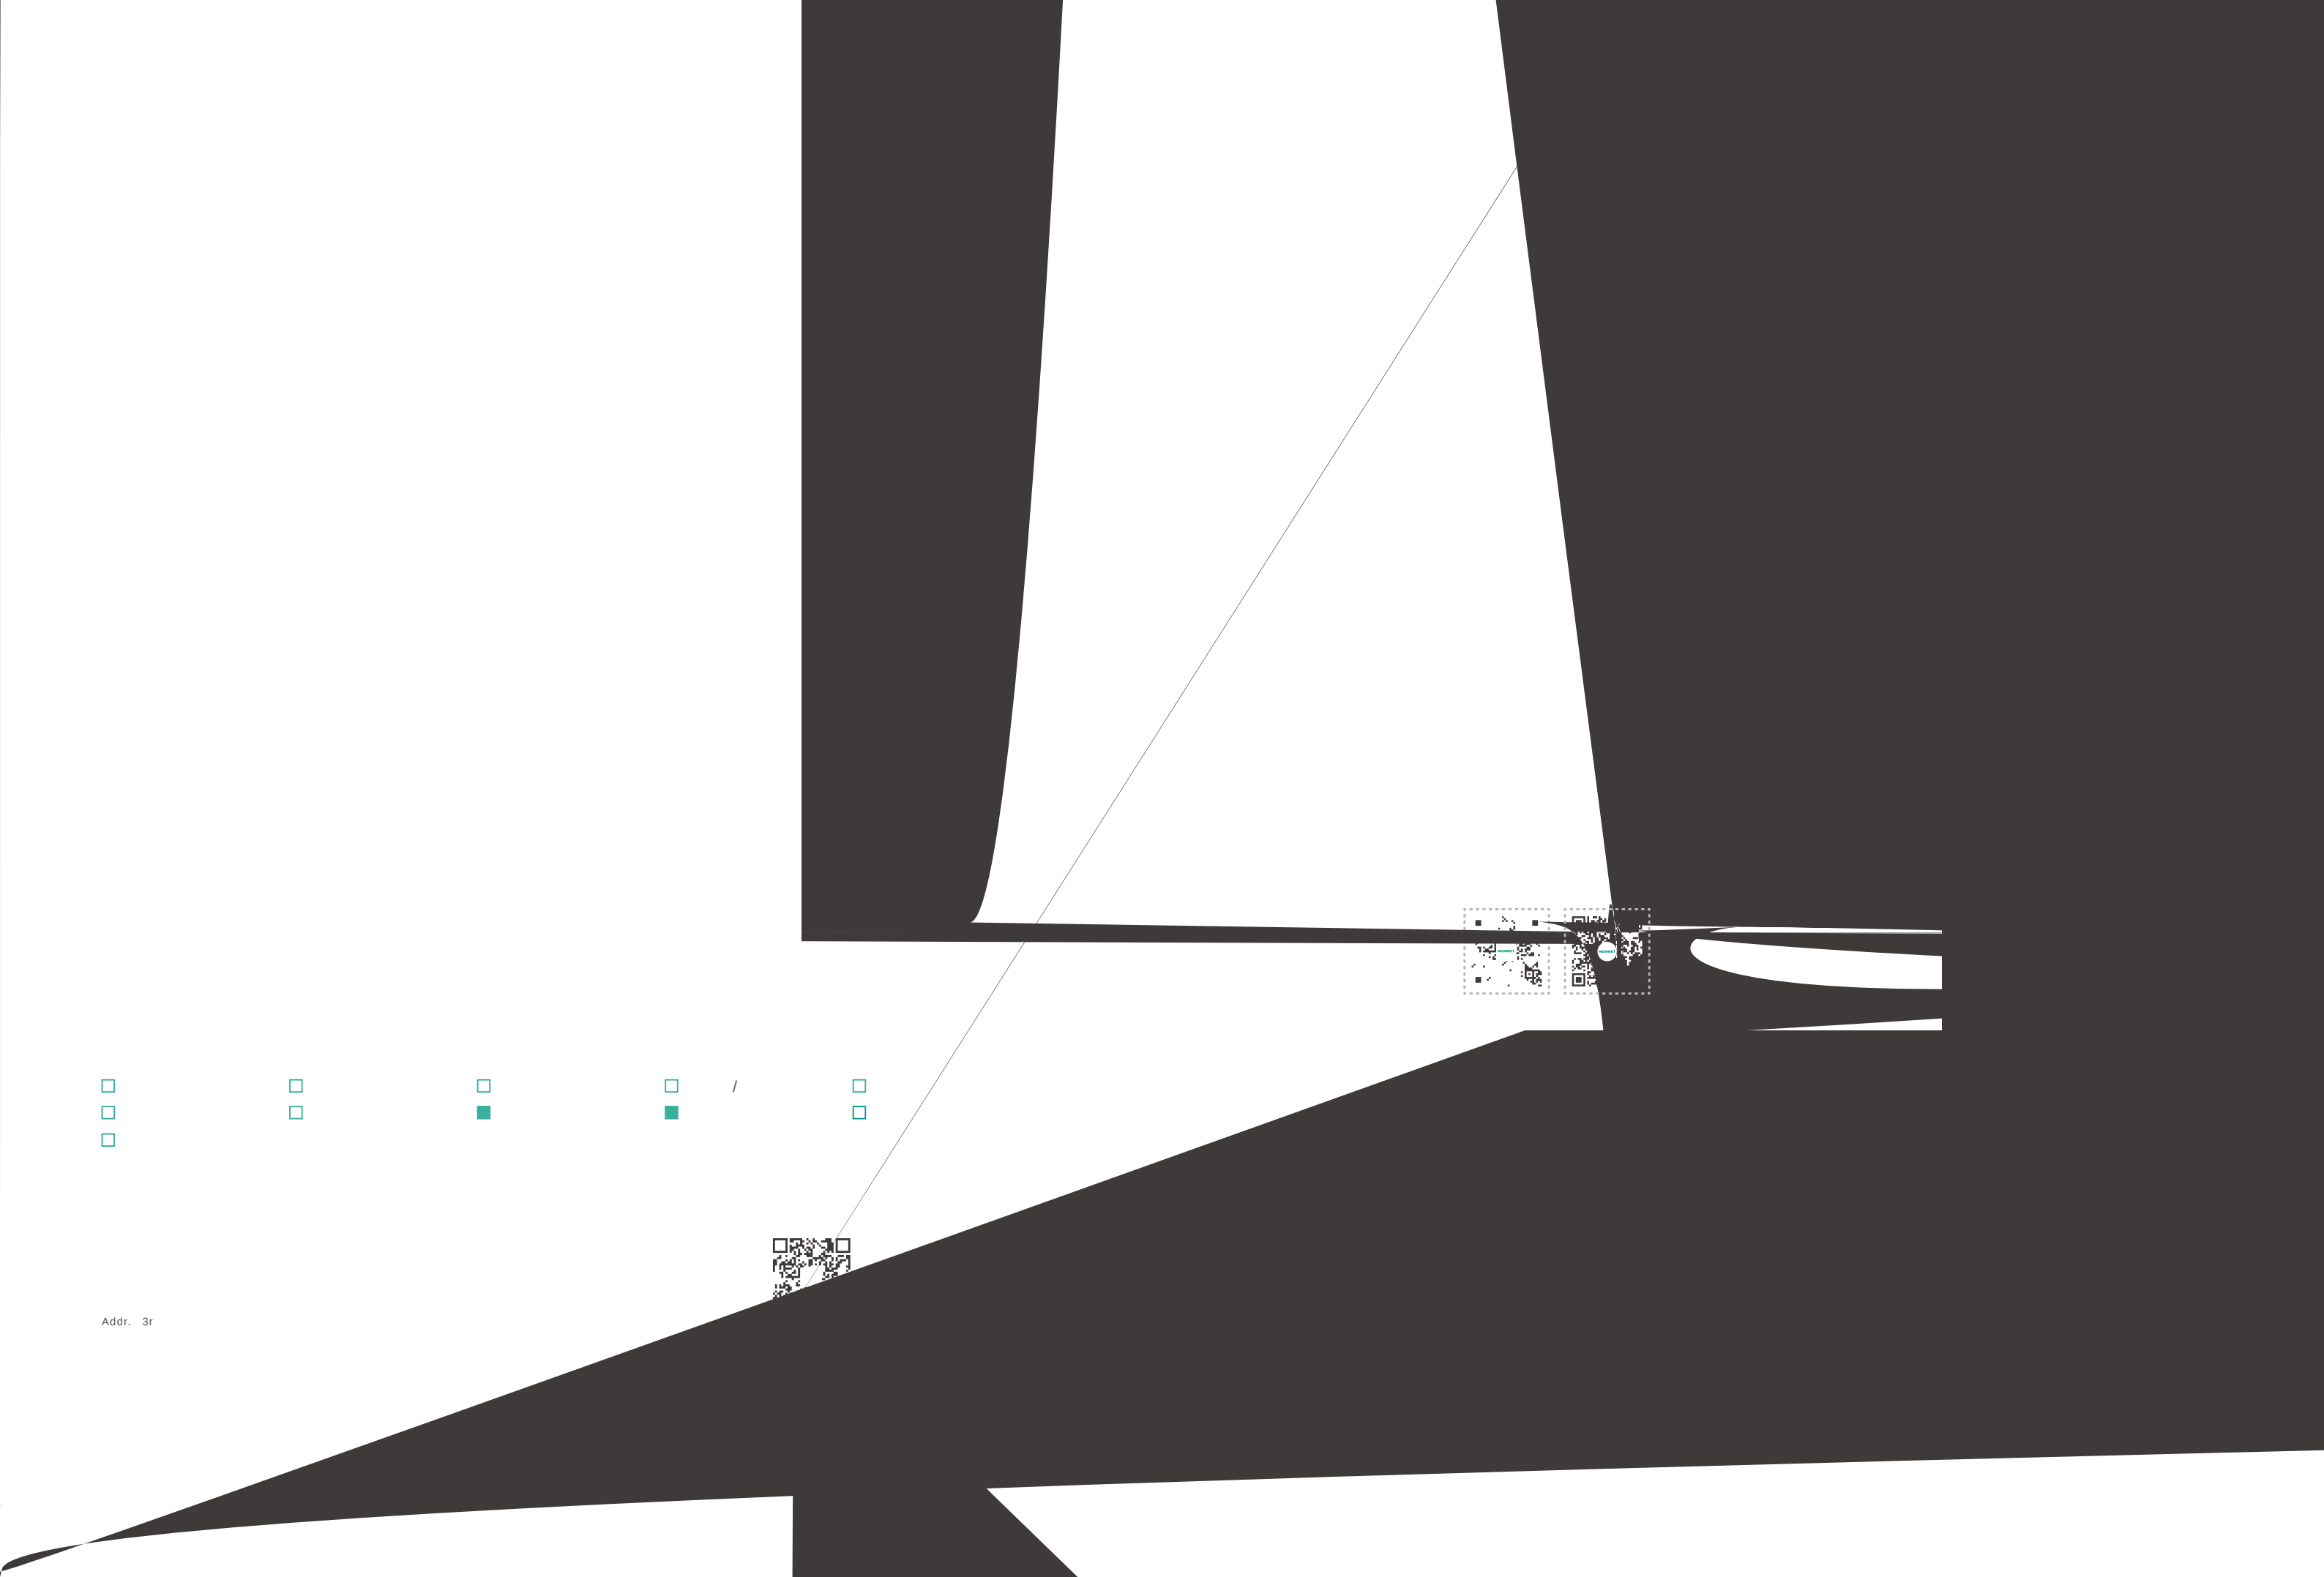

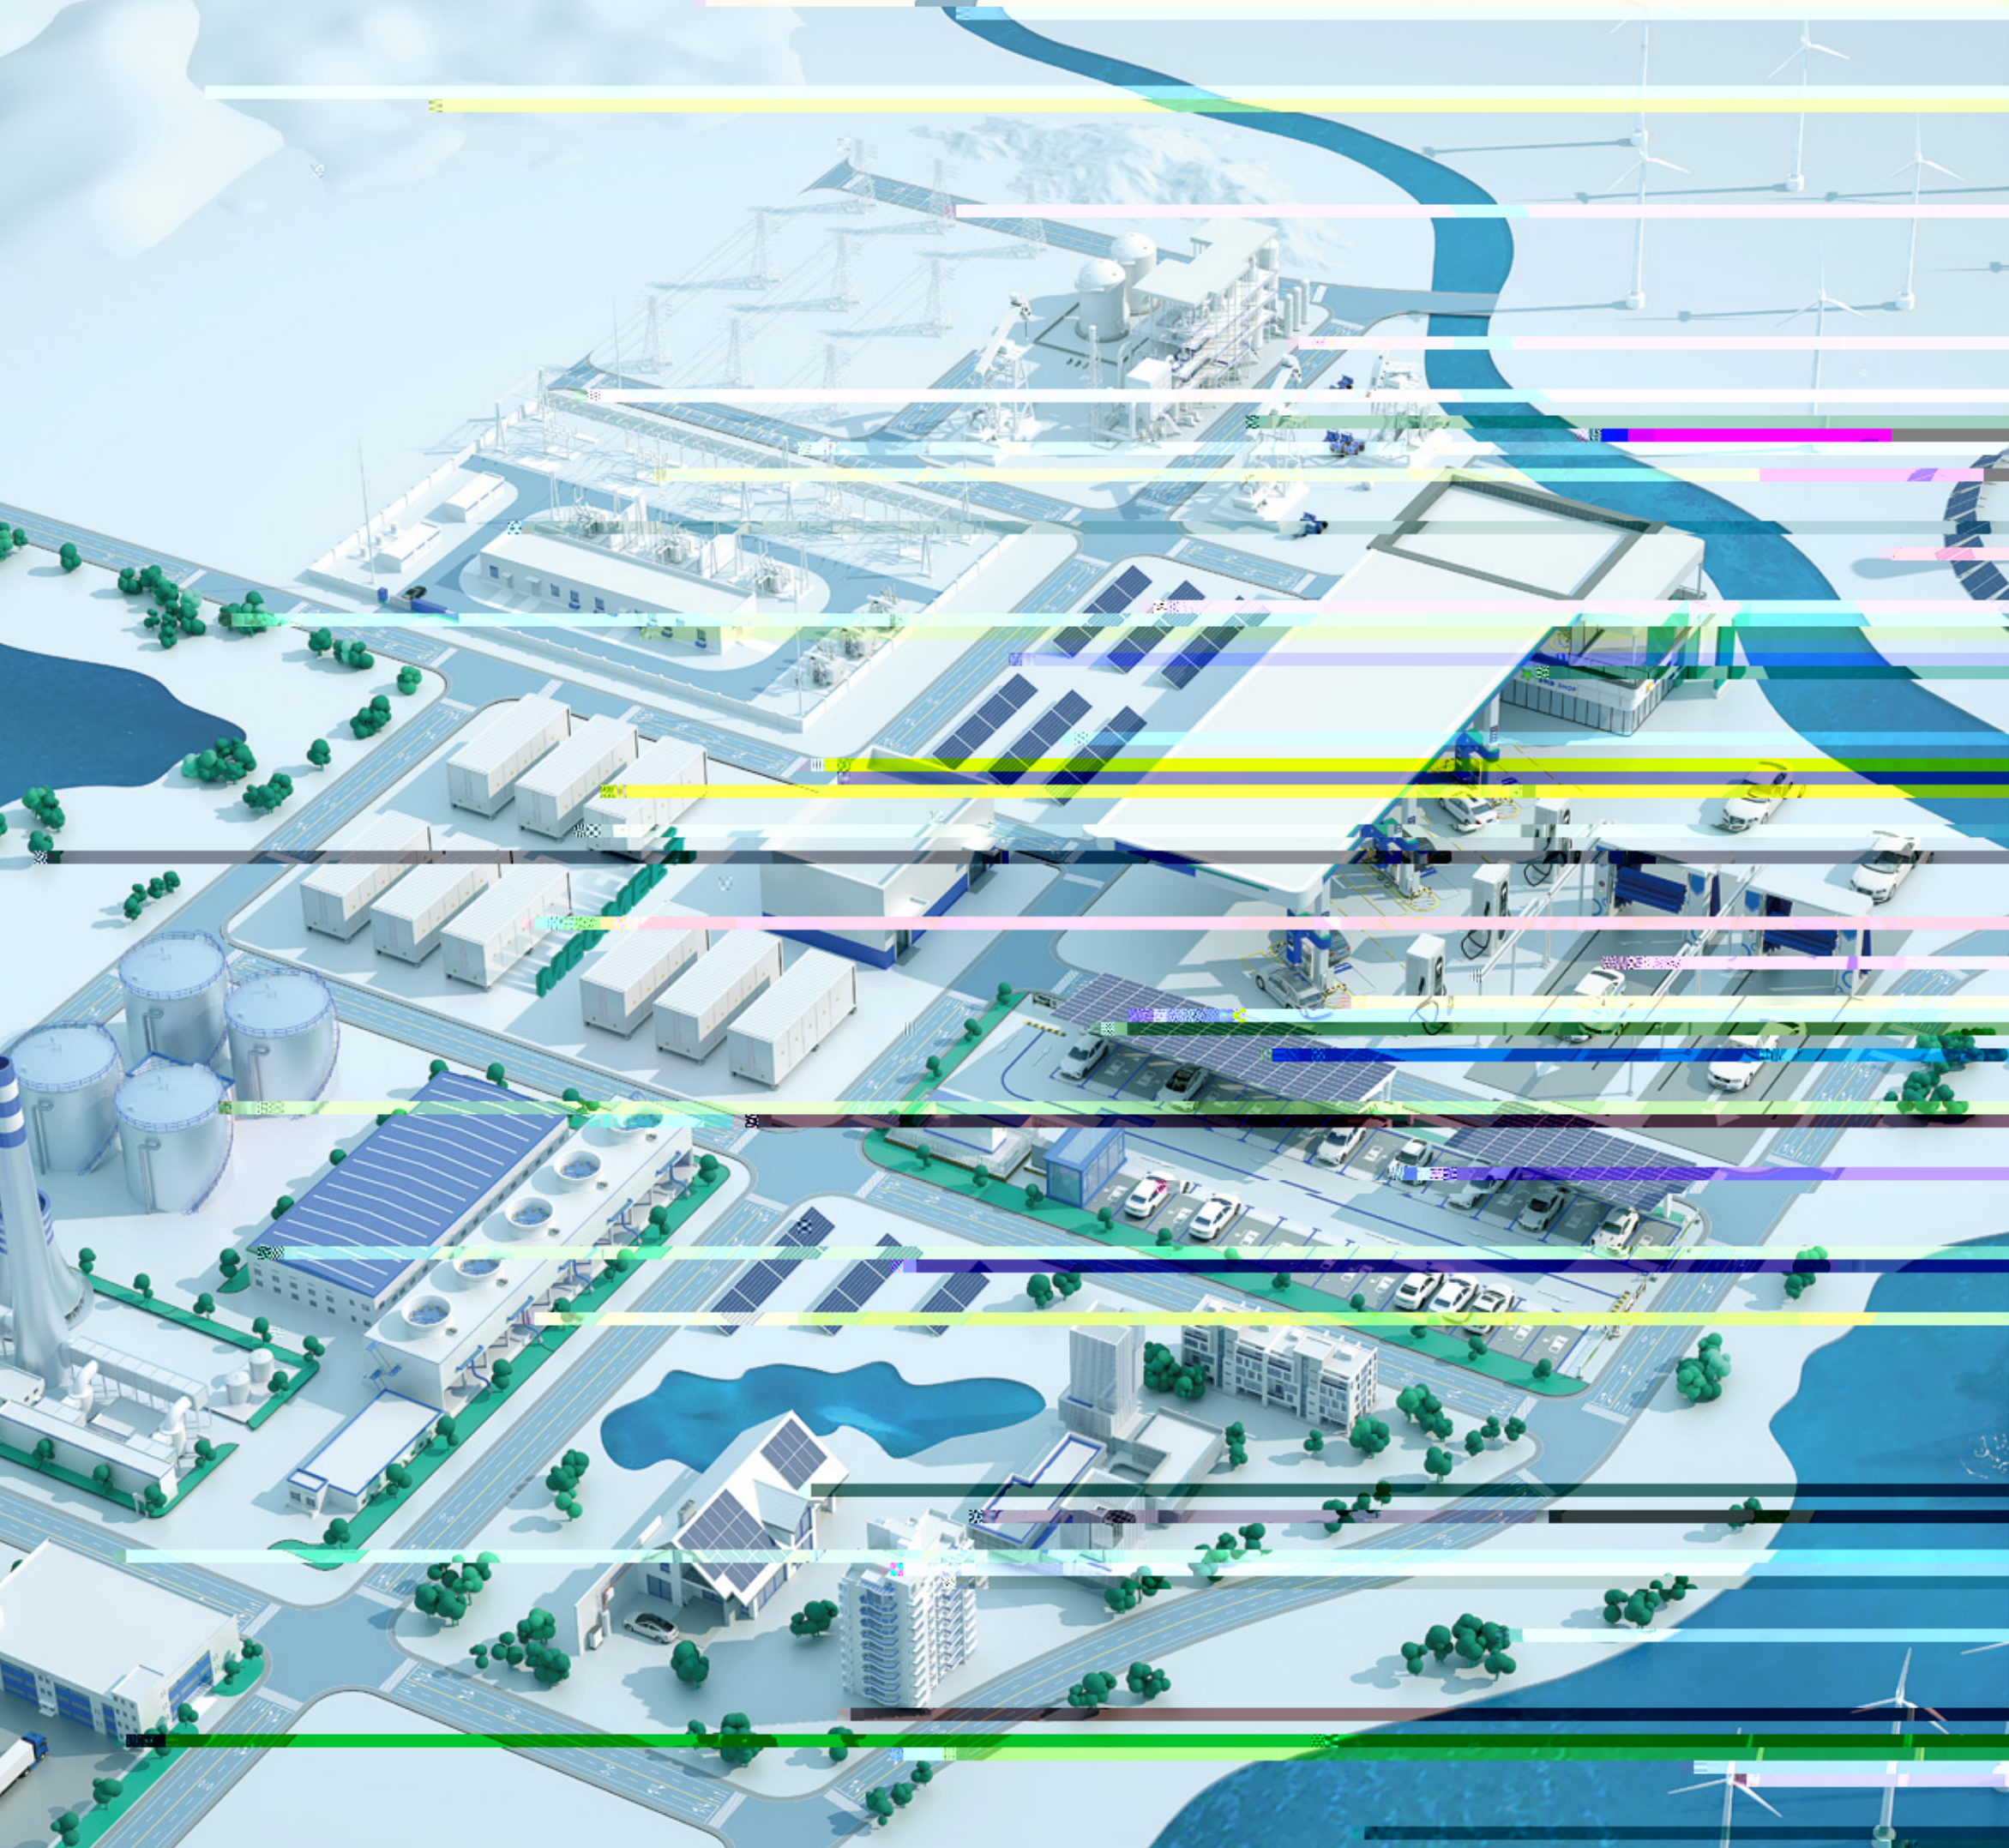

01
03
05
07
09
11

13
15
17
19
21
23
25

27
28
29

MIPC1000-80T
MPS10020KT-C
MPS20020KT-C
MIPC1000-100
MIPC1000-100C2
MIPC1000-160L
MIPC1000-135C1

CU
CU
P C

30 kW






120 kW



240 kW



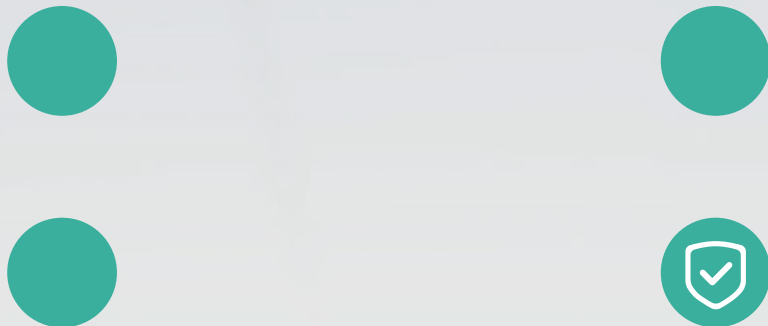


() ()



OTA



OTA

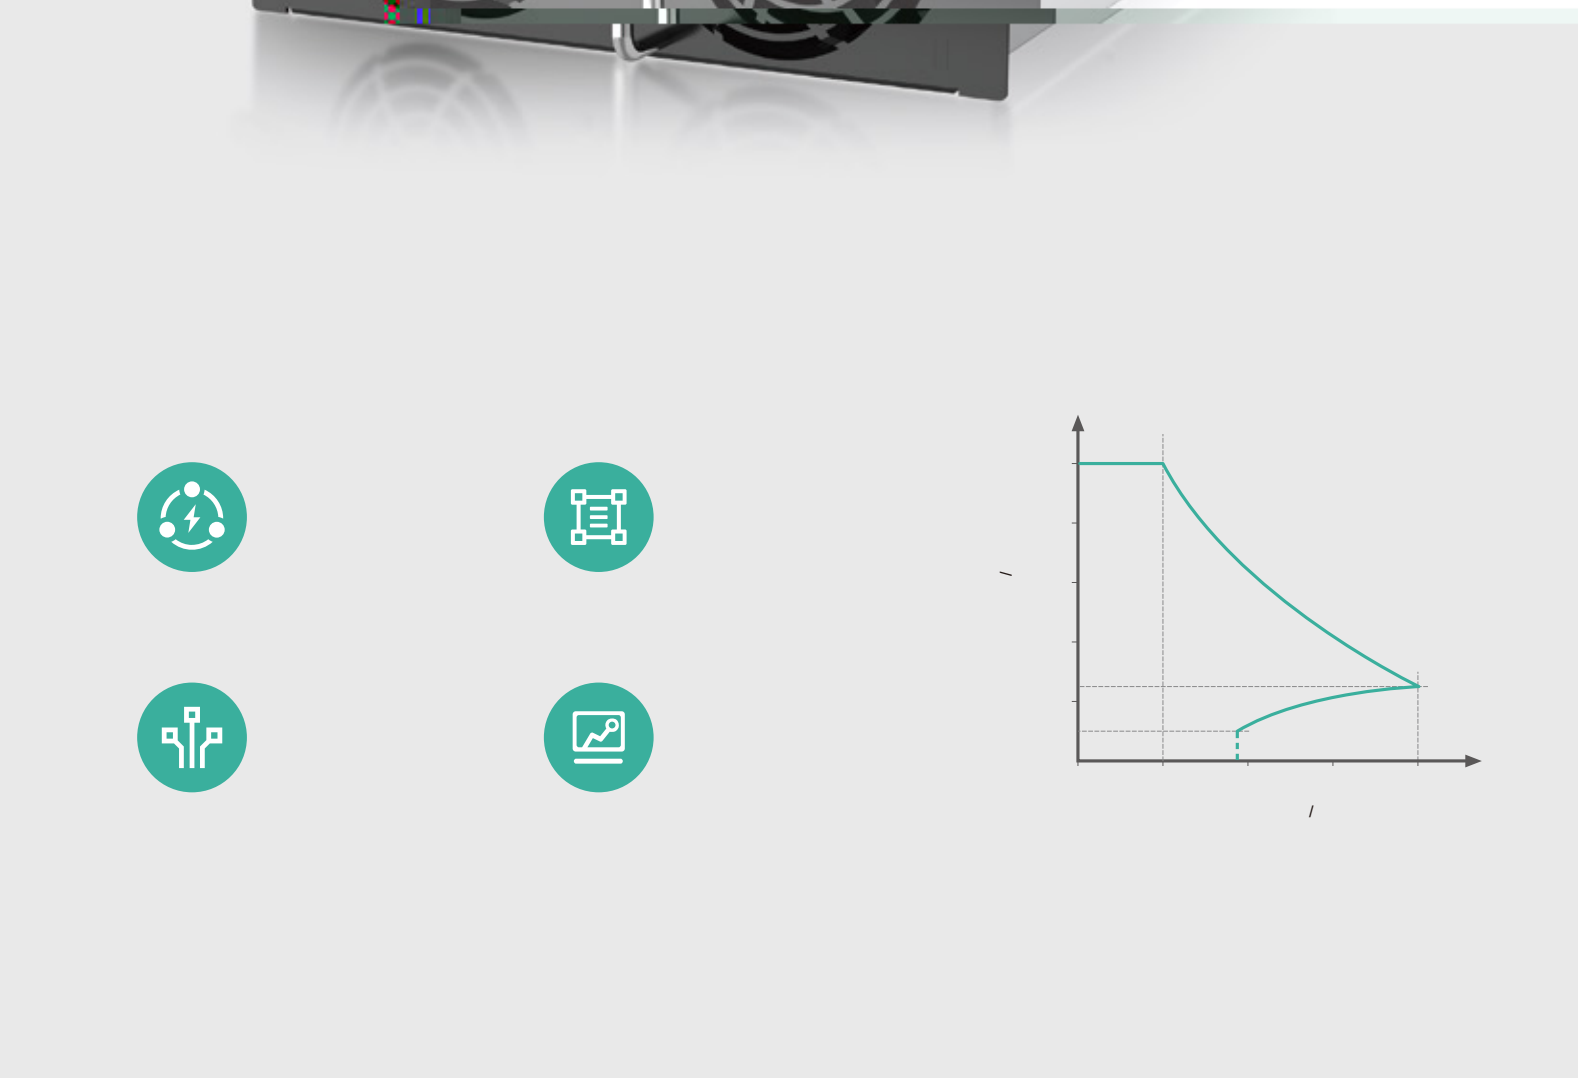



()

≈

≈

≈

≈ ()

≈

--


--

--





MIPC1000-100

MIPC1000-100G1 UL

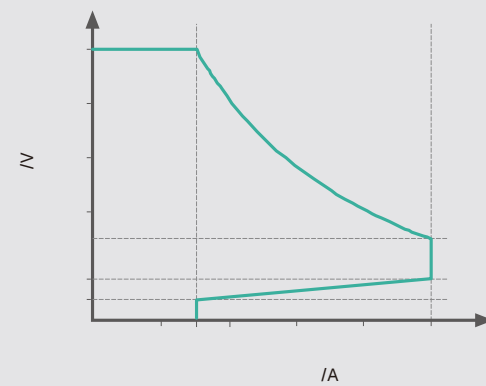


30 kW
MIPC1000-100C2

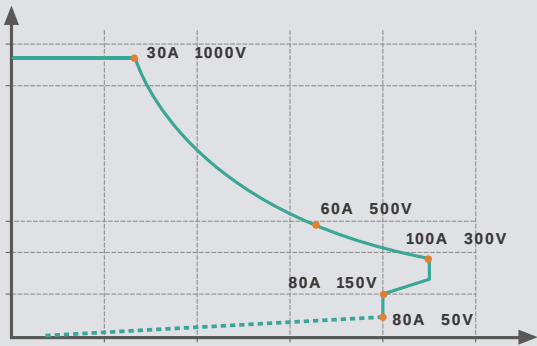

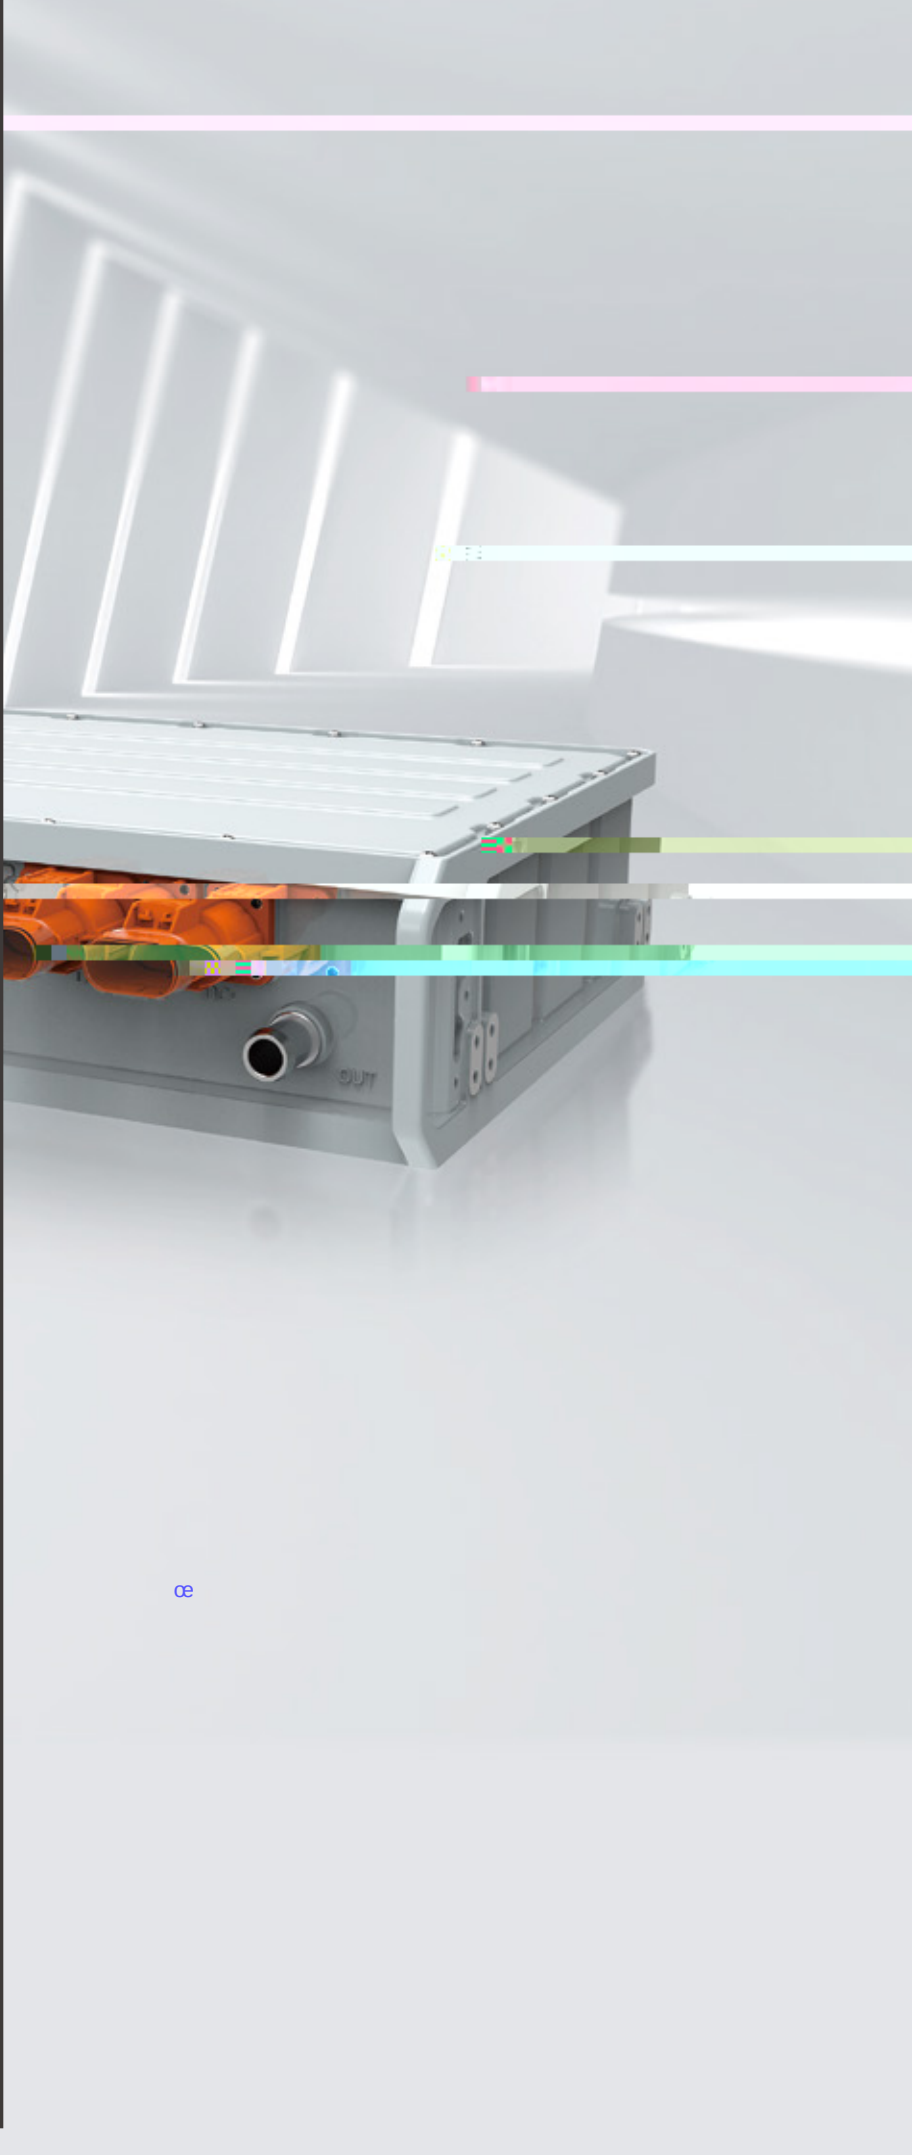


40 kW

MIPC1000-135C1

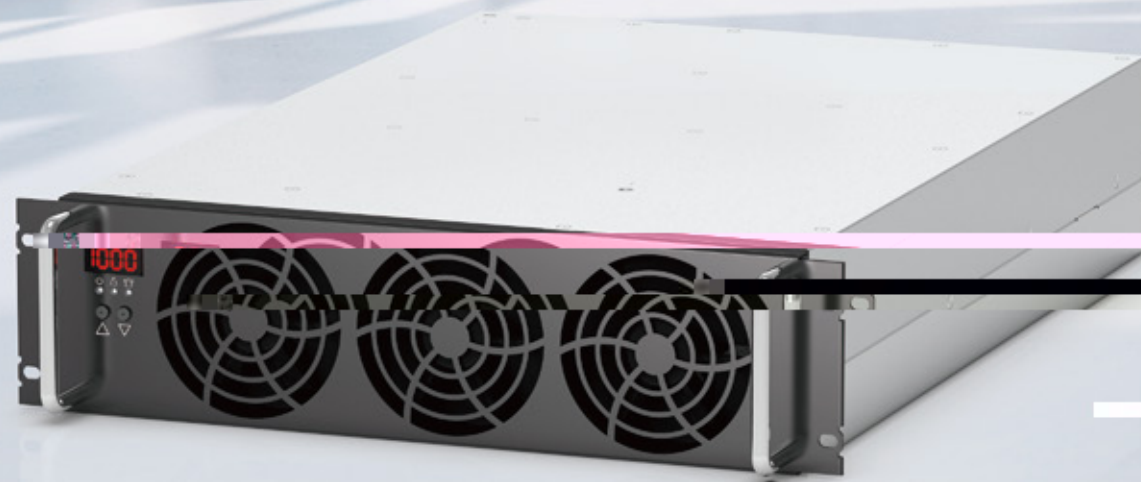

(CCU)

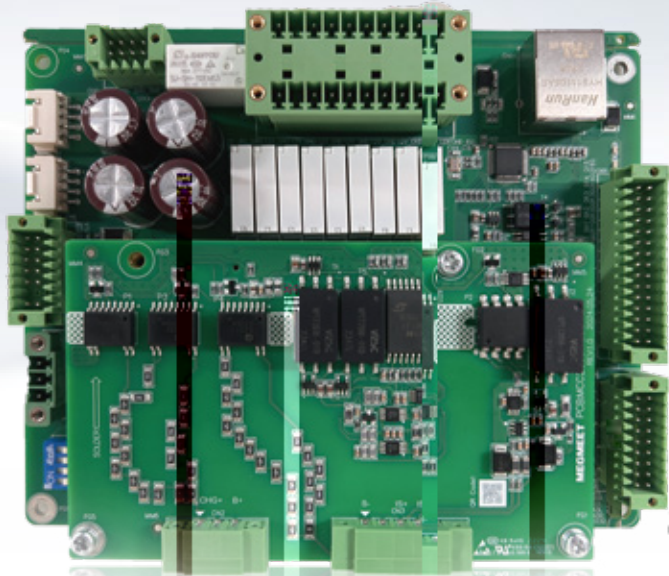


CCU

BMS



- 2 DO
- 15 DI
- 1 PWM
- 2
- 3 AN
- 1
- 1 RS485
- 1 RS232

(CU)

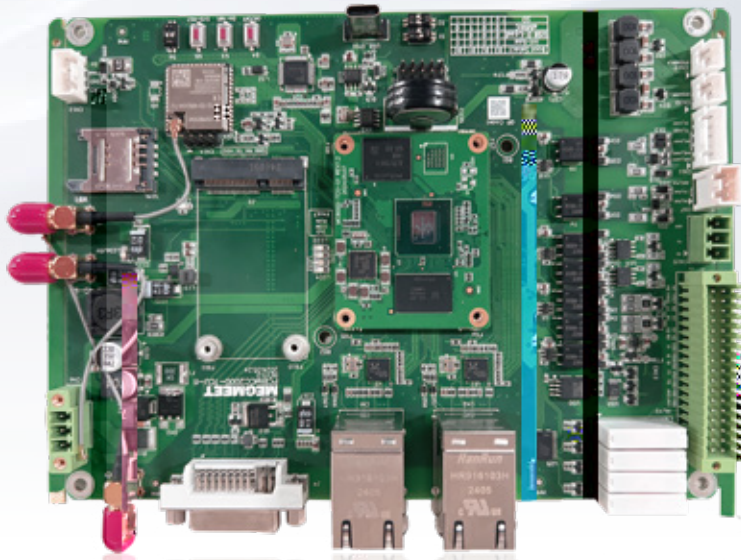

TCU

LVDS



POS M1 QR




4G WIFI



- 64 Cortex A53 , 1.8 GHz
- LPDDR4,
- 3 RS232
- 2
- 1 RS485
- 2 , 10 / 100 M
- 1 , 10 / 100 / 1000 M

(PLC

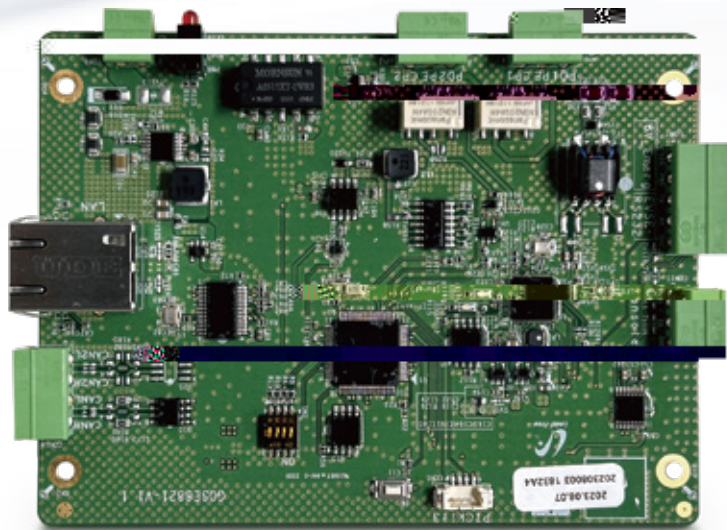

PLC

- CCS, CHAdemo()
 - CCS DIN 70121, ISO15118
 - CHAdemo , 2.0 ()
 - IEC 61851-2:2023
 - ()
- ,
 - AN ,
 - RS232 , ,
 - Proxima Detection(PD)
 - EIM, PnC

12 / 24 VDC

9~26 VDC

for CCS, Max. 40

119 x 229 (mm)

-40 °C ~ +85 °C

CCS

R&D

>3000

35% ▽

1990

↑ 2024 400+

&

32

• 9

38

• 28



CNAS TUV UL-WTDP UL-CTF



ODM
DEM

